


**LED panel M625 3000K DALI - Ceiling-/wall luminaire
PLPFM625DALI36W3000K**



LEDVANCE
PLPFM625DALI36W3000K
4058075440616
4058075440616 EAN/GTIN

77,70 GBP excl. VAT**
plus shipping bulky item

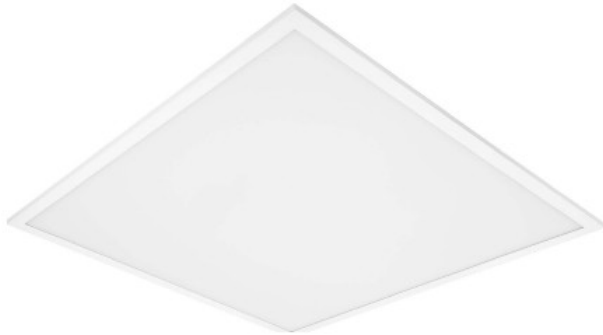

14-16 days* (GBR)

LED panel M625 3000K DALI PLPFM625DALI36W3000K Energy efficiency class of the permanently installed lamp A++, A+, A (LED), Suitable for wall mounting, Suitable for pendant mounting, Suitable for ceiling mounting, Suitable for recessed mounting, Light source LED not replaceable, With light source, Housing material aluminium, Housing color white, cover material opal plastic, louvre design matt, type of voltage AC, nominal voltage 220 ... 240V, nominal LED current at constant current 160 ... 160mA, with control gear, dimming DALI, dimming dependent on control gear, light distributor diffuser lens/- Optics/panel, beam angle extremely wide >80°, light emission direct, rated service life L70/B10 at 25 °C 100000h, rated service life L70/B50 at 25 °C 100000h, rated service life L80/B10 at 25 °C 60000h, rated service life L80/B50 at 25 °C 60000h, rated service life L90/B10 at 25 °C 35000h, rated service life L90/B50 at 25 °C 35000h, degree of protection (IP) IP40, S Impact resistance IK03, protection class II, rated ambient temperature according to IEC62722-2-1 -10 ... 50°C, suitable for emergency lighting, glow wire test according to IEC 60695-2-11 650 °C - 30 s, max. system power 36W, rated luminous flux according to IEC 62722 -2-1 4320lm, light color white, color temperature 3000 ... 3000K, color rendering index CRI 80-89, luminous efficacy of luminaire 120lm/W, power factor 0.95, width 620mm, height/depth 32mm, length 620mm, installation length 600mm, installation width 600mm, installation height /-depth 80mm, type of wiring suitable for through-wiring, number of poles 5, square lay-in luminaire, tool-free installation, for 625 x 625 mm ceiling systems and DALI-2 IoT technology. Product features: IoT-capable lamp with DALI-2 technology. Extruded aluminum frame. Polystyrene diffuser. 3-pole terminal block, cable cross-section up to 3 x 2.5 mm² (25 W and 30 W versions). 5-pole connection terminal, cable cross-section up to 5 x 2.5 mm² (36 W versions and DALI types). Service life (L80/B10): up to 60,000 h (at 25 °C). Product benefits: Suitable luminaire for VIVARES and other DALI-2 light management systems. Tool-free electrical connection thanks to push-button connection terminal. Through-wiring possible with included connection box. Energy savings thanks to high system light output: up to 120 lm/W. Comfortable light and high color consistency. External driver for enhanced flexibility and easy installation. Low-flicker light thanks to a special electronic ballast. Emergency lighting possible with LEDVANCE Emergency Conversion Box. Areas of application: Direct replacement for luminaires with...

YOUR ADVANTAGES



WORLDWIDE TRADE
Corporate video eibmarkt®



99% CUSTOMER SATISFACTION
> 500,000 customers worldwide



DHL TRACK & TRACE
Shipment tracking



COMPLAINTS HANDLING
Obliging and 100% safely



25 YEARS OF EXPERIENCE
In worldwide mail order



ORDER LIVE CHAT
With order history



SHORT DELIVERY TIME
Warehousing



REFUND
Within 14 days



DATA PROTECTION
Guarantee

© 1997-2024 eibmarkt.com GmbH - Kemmlerstrasse 1 - 08527 Plauen - Germany

eibabo® and eibmarkt® are registered trademarks of EIBMARKT® GmbH holding company (www.eibmarkt.de). eibabo® is a company of eibmarkt.com GmbH. eibmarkt.com GmbH is a 100% subsidiary of EIBMARKT® GmbH holding.

* Note on delivery time: Day = Monday to Friday, no public holiday in Bavaria or Saxony. Goods are also delivered on Saturdays (DHL).

** Payment methods may vary from country to country. All prices plus shipping and excluding customs duties or other additional costs (import sales tax) for deliveries outside the EU.

*** Savings compared to RRP = the manufacturer's recommended retail price. RRP is the price recommended to retailers by the manufacturer, importer or wholesaler as a resale price to the customer. The RRP is also referred to as the list price and is defined as the highest possible price that a buyer would pay for a specific product before any discounts (Source of gross list prices: Germany).

eibabo® the Smart Home technology shop
eibabo® electronics cheap online order
eibabo® electric appliances buy online

